


WH-8A

5-AXIS CNC DUAL POINT COILING MACHINE

For wire diameters of $\varnothing 0.2 \sim \varnothing 0.8$ mm / $\varnothing 0.0078" \sim \varnothing 0.0314"$

The WH-8A has upgraded user-friendly controls, advanced mechanics, and advanced IOT technology while remaining cost effective.

MNO2 (MEC New Operation 2) allows the user to easily create programs for multiple shapes, and our AUTOMATIC PROGRAMMING feature reduces setup times.

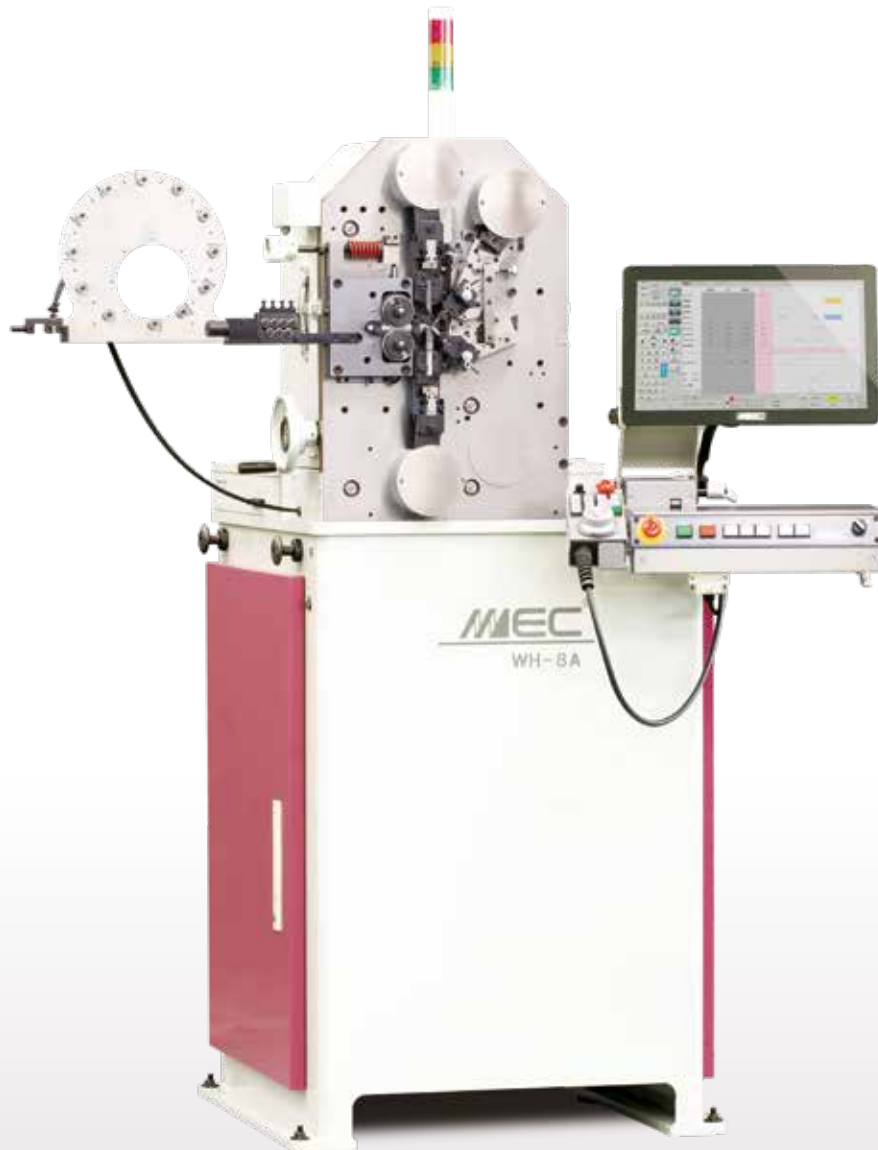

[Click here for processing video](#)



MEC

Features

5-axis control with an emphasis on operability

This 5-axis control function gives smooth control of feed, cut, wedge pitch, push pitch, and outer diameter. The crank slide mechanism allows for high speed production. By incorporating the mechanical parts into the machine, you have more control of the coiling space within the mechanical frame.

Support for IOT

The operating status of machine can be monitored with mobile phones and PC, and regular maintenance with preventive maintenance functions can contribute to improved production efficiency.

Optional equipment

Unit for left-hand coiling, bracket for initial tension servo motor, single point, and contact sensor for coil length measure are available as optional features.

Improved operability with the MEC New Operation 2 (MNO2)

The **MNO2**, a newly developed spring forming-dedicated program, easily organizes important statistics about the machine, including program flow, operating status of each axis, input/output, and jump, etc., as with our other spring machines. Furthermore, the program editing function has greatly evolved, and the new navigation system make it easier to create a program. The coil number program allows to easily change feed, pitch, outer diameter, and initial tension on the advanced pitch diagram screen, making it easier to adjust basic coils.

In addition to the automatic coil length correction function, based on the capacitance length measurement method, the multi-functional production manager system makes production easy to control.




Dual points area for right hand coils
Simple & user-friendly



Program for number of coils (cylindrical coils)
The program makes easy to adjust the basic coils.

Specifications

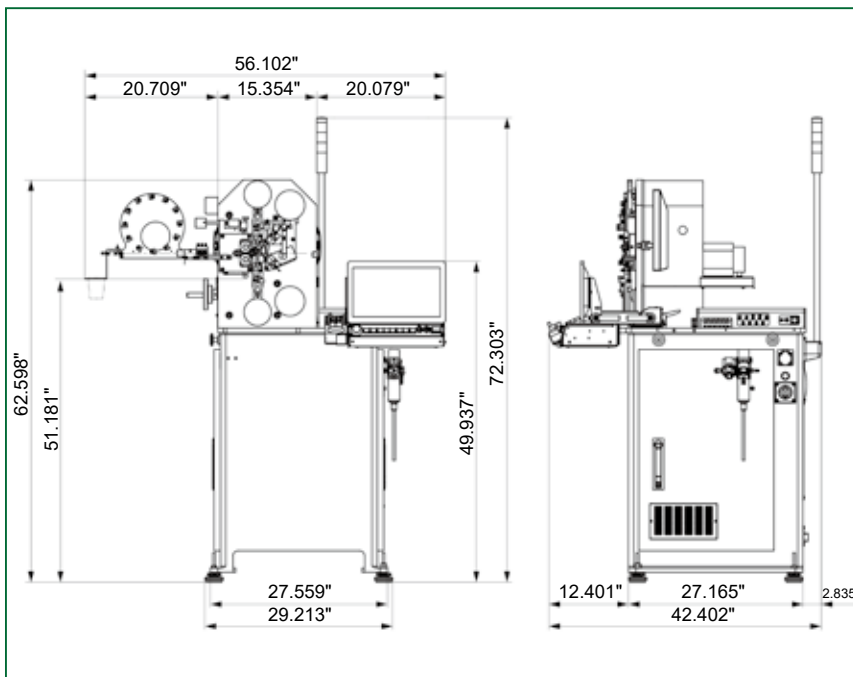

Specifications are subject to change without notice for product improvement.

Machine name	WH-8A
Wire diameter	ø0.2 ~ ø0.8 mm (ø0.0078" ~ ø0.0314")
Outer diameter	ø28 mm (ø1.1023")
Index	D/d 4 or more
Feed axis	0.001 mm (0.00004")
Max speed	925 ft/min
Cut axis*	0.001°
Wedge-pitch axis*	0.0001 mm (0.000004")
Push-pitch axis*	0.0001 mm (0.000004")
Point axis*	0.0001 mm (0.000004")
Solenoid valves	4 pcs (Max 8 pcs)
Air pressure	Max 0.5 MPa
Power source	3-phase AC 200V, 15A
Net weight	1366.87 lb
Control device	Windows
Software	MNO2
Display	15.6" Full HD touch screen
External memory	USB Thumb drive
Temperature	0 ~ 40°C (32 ~ 104°F)

*Program input unit, which does not represent accuracy.

AMADA PRESS SYSTEM AMERICA INC.

1840 AIRPORT EXCHANGE BLVD #200
ERLANGER, KY. 41018 U.S.A.

Inquiry

